





# **EVOLUTION**

RETAIL DISPLAYS

**Evolution** and **Evolution**<sup>+</sup> units are available in hot, ambient and refrigerated options, making it possible to mix-and-match products from the range to suit a wide selection of food service outlets.



SEH90ED2

SEH60ED1 SINGLE HINGED DOOR

### **HEATED ASSISTED SERVICE**

These high capacity display cabinets are perfectly suited for deli's, coffee shops, convenience stores and the rapidly expanding market of 'Food 2 Go' outlets. Available in both assisted and self service to give you maximum control over how food is displayed and purchased.

#### **PRODUCT FEATURES**

- Multi-zone air jet heating technology surrounds the product on display in an envelope of heat by recirculating temperature controlled hot air
- Heated flat base and two inclined shelves
- Independent temperature control to each heat zone
- Enhanced specification LED illumination to each level
- wwHinged rear opening double glazed door/s
- Enclosed to the front for assisted service



SEH90ED2 DOUBLE HINGED DOOR

MODEL	DIMENSIONS (mm)	DOORS	POWER (kW)
SEH60ED1	600 x 750 x 1350	1	1.9
SEH90ED2	900 x 750 x 1350	2	2.8
SEH120ED2	1200 x 750 x 1350	2	3.6

#### **HEATED SELF SERVICE**

Perfect for displaying impulse buy and 'Grab & Go' hot foods such as pies, sandwiches, hot rolls, soup and pizza slices in independently controlled temperature zones. The temperature of pre-heated food is held between 65°C - 95°C.

Ambient units are also available to display complementary products.

#### PRODUCT FEATURES

- Multi-zone air jet heating technology surrounds the product on display in an envelope of heat by recirculating temperature controlled hot air
- Heated flat base and two inclined shelves
- Independent temperature control to each heat zone
- Enhanced specification LED illumination to each level
- Hinged rear opening double glazed door/s
- Open to the front for self service

MODEL	DIMENSIONS (mm)	DOORS	POWER (kW)
SEH60SPD1	600 x 750 x 1350	1 Rear	1.9
SEH90SPD2	900 x 750 x 1350	2 Rear	2.8
SEH120SPD2	1200 x 750 x 1350	2 Rear	3.6
SEH60SW	600 x 750 x 1350	Solid back	1.9
SEH90SW	900 x 750 x 1350	Solid back	2.8
SEH120SW	1200 x 750 x 1350	Solid back	3.6



**SEH90SPD2** BLACK PCS BASE PANEL OPTION



SEH60SPD1 WHITE LAMINATED BASE PANEL OPTION



SEH90SPD2 DOUBLE HINGED DOOR



**SER90E** WHITE LAMINATED BASE PANEL OPTION

### REFRIGERATED ASSISTED SERVICE

The Evolution range has been designed to maximise performance at the same time as offering an aesthetically pleasing suite of displays that can co-ordinate with any backdrop.

Standing 1350mm tall, it is the ideal height to ensure staff can make eye contact with customers without obstruction. The slender black border perfectly frames the contents whilst LED liogfhting helps to optimise food display.

**SER60E** SINGLE HINGED DOOR



**SER90E** DOUBLE SLIDING DOORS

#### **OPERATING CONDITIONS**

- Designed to comply with the operating requirements of BS EN ISO 23953 2:2015.
- Performance level M1 (-1°C to +5°C) in Climate class 3 (25°C- 60% Relative Humidity. 0.2m/s wind speed)

#### **PRODUCT FEATURES**

- Microprocessor based temperature control with automatic defrost and condensate handling system, for trouble free operation
- Enhanced specification LED illumination to each shelf
- Double glazed eco gas filled thermo glass panels
- Three height adjustable 8mm toughened glass shelves can be inclined by 10° if required
- Stainless steel removable recessed well for service access and cleaning
- 900mm & 1200mm models feature sliding double glazed rear doors and 600mm models feature a hinged door
- 900mm & 1200mm models are rear vented 600mm units are through vented

MODEL	DIMENSIONS (mm)	DOORS	POWER (kW)
SEH60E	600 x 750 x 1350	1	1.9
SEH90E	900 x 750 x 1350	2	2.8
SEH120E	1200 x 750 x 1350	2	3.6

#### REFRIGERATED SELF SERVICE

The glass panels on Evolution refrigerated cabinets are injected with Argon gas, designed to stop condensation and heat transfer, allowing hot and cold units to be placed side-by-side.

The inclusion of a Transerv compressor removes the need for unsightly grills to the front of the unit. This excludes the 600mm unit.



SER90SP WHITE LAMINATED BASE PANEL OPTION AND TICKET STRIPS

#### **OPERATING CONDITIONS**

- Designed to comply with the operating requirements of BS EN ISO 23953 2:2015.
- Performance level M2 (-1°C to +7°C) in Climate class 3 (25°C- 60% Relative Humidity. 0.2m/s wind speed)

#### **PRODUCT FEATURES**

- Microprocessor based temperature control with automatic defrost and condensate handling system, for trouble free operation
- Enhanced specification LED illumination to each shelf
- Double glazed eco gas filled thermo glass panels
- Three height adjustable 8mm toughened glass shelves can be inclined by 10° if required
- Stainless steel removable recessed well for service access and cleaning
- 900mm & 1200mm models feature sliding double glazed rear doors and 600mm models feature a hinged door
- $\bullet$  900mm & 1200mm models are rear vented 600mm units are through vented

MODEL	DIMENSIONS (mm)	DOORS	POWER (kW)
SER60SP	600 x 750 x 1350	1 Rear	1.9
SER90SP	900 x 750 x 1350	2 Rear	2.8
SER120SP	1200 x 750 x 1350	2 Rear	3.6
SER60SW	600 x 750 x 1350	Solid back	1.9
SER90SW	900 x 750 x 1350	Solid back	2.8
SER120SW	1200 x 750 x 1350	Solid back	3.6



SER60SP SINGLE HINGED DOOR



**SER90SP** WITH NIGHT BLIND

THERMAL NIGHT BLIND



WIRE DISPLAY RCKS



SHELF EDGE TICKET STRIPS

### **EVOLUTION AND EVOLUTION PLUS**

#### BASE WRAP OPTIONS

- Standard product includes bright polished stainless or coloured plastic coated steel base wrap
- Additional cost options of decorative laminated panels
- Units are also available without a base wrap for self cladding or installing up to a counter front

#### OPTIONAL EXTRAS

- Thermal pull down night blind
- Shelf edge ticket strips that simply hang on to the front of the shelves
- Wire product display racks
- Castor covers satin finish stainless steel covers
- Impulse brackets

#### **HEATED SELF SERVICE**

The concept of a one-stop, unmanned solution for 'Grab & Go' food service is now at the forefront of the food service offering.

Consumers are looking for a rapid, convenient alternative to traditional vending machines and food service counters. The Evolution<sup>+</sup> range has been designed to increase customer engagement, speed up service and offer freshly made, healthy food options.

#### **HEATING TECHNOLOGY**

• Multi-zone air jet heating technology surrounds the product on display in an envelope of heat by recirculating temperature controlled hot air

#### PRODUCT FEATURES

- Constructed using durable bright polished and satin finish stainless steel with toughened glass sides. Black painted steel base panels & top
- Heated flat base and 3 shelves
- Independent temperature control to each heat zone
- Enhanced specification LED illumination to each level
- Supplied on four low level castors
- Integral ticket strip facility
- Shelf edge ticket strips

MODEL	DIMENSIONS (mm)	POWER (kW)
SEHT60SW	600 x 750 x 1950	2.8
SEHT90SW	900 x 750 x 1950	4.3



SEHT60SW BLACK PCS BASE PANEL AND TOP / SOLID BACK WALL



'GRAB & GO' MICROMARKET CONCEPT INCLUDING EVOLUTION+ SELF SERVICE DISPLAYS



SERT60SW BLACK PCS BASE PANEL AND TOP / SOLID BACK WALL

### REFRIGERATED SELF SERVICE

The Evolution and Evolution<sup>+</sup> ranges have been designed to display chilled sandwiches, dairy, drinks and salads in the most practical yet attractive way possible. Food and drink are safely held between 0°C - 7°C.

Ambient units are also available to display complementary products.



SEHT60SW / SERT60SW



**SERT60SW** WITH NIGHT BLIND


#### **OPERATING CONDITIONS**


• Multi-zone air jet heating technology surrounds the product on display in an envelope of heat by recirculating temperature controlled hot air


#### PRODUCT FEATURES


- Constructed using durable bright polished and satin finish stainless steel with toughened glass sides. Black painted steel base panels & top
- Microprocessor based temperature control with automatic defrost and condensate handling system, for trouble free operation
- Illuminated display via integral LED lighting to each level
- Four height adjustable 8mm toughened glass shelves. Shelves can be inclined by 10 degrees if required
- Stainless steel removable recessed well for service access and cleaning
- The temperature controllers can be adjusted between 0°C - 10°C
- Shelf edge ticket strips
- Thermal pull down night blind


MODEL	DIMENSIONS (mm)	POWER (kW)
SERT60SW	600 x 750 x 1950	2.8
SERT90SW	900 x 750 x 1950	3.1

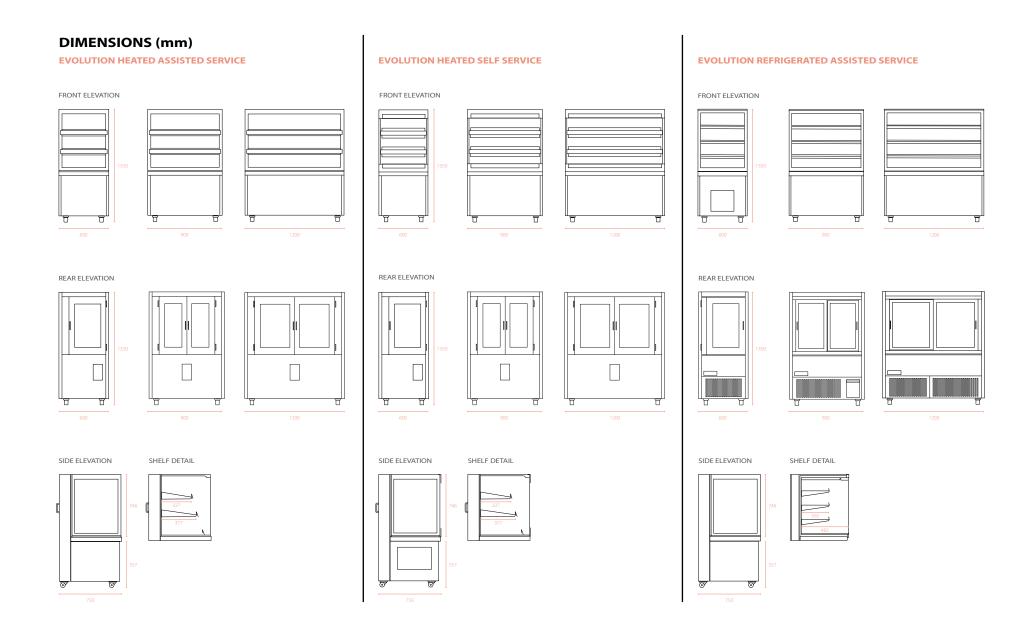








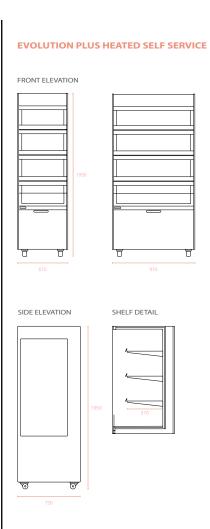

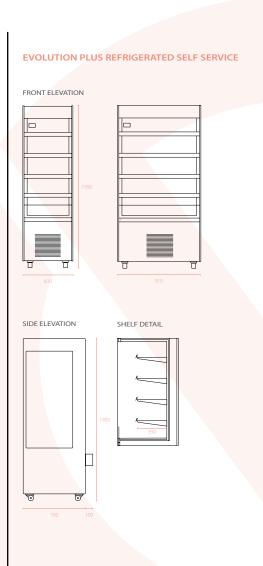





manufactured in the UK and carry a two years warranty

